

COBALT SHWR PK2

COBALT Shower Range Cobalt Shower Pack 2 Complete



Specification

| | |
|--|-----------------------------------|
| Finish/Colour: | Chrome Plated |
| Main Construction Material: | Brass; ABS |
| No of Controls: | 3 |
| Shower Type: | Dual Control |
| Shower Head Type: | Both |
| Shower Kit: | Fixed Head |
| Valve/Cartridge Type: | 3/4" Ceramic Disc Valve 1/4 turn |
| Maximum Hot Water Supply Temperature °C: | 65 |
| Plumbing System Suitability: | Suitable for all plumbing systems |
| Minimum Dynamic Pressure (bar): | 0.2 |
| Maximum Dynamic Pressure (bar): | 5 |
| Maximum Static Pressure (bar): | 10 |
| Connection Inlet: | 15mm Compression |
| Connection Outlet: | G 1/2" |
| Isolation Valve Included: | No |
| Check Valve Included: | Yes |

Features:

- This shower pack has soft square handles on our Cobalt shower valve with integral two outlet diverter. It has a 200mm square fixed head with shower arm; a single function handset and hose with integral handset holder and wall outlet.
- The shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Dual control - flow and temperature are controlled separately
- Cartridge can be accessed from the front, Requires rear access to service filters
- 15mm inlet connections


Product Certifications:



For more products, visit our website:
<http://www.bristan.com>



Dimensions (measurements in mm)

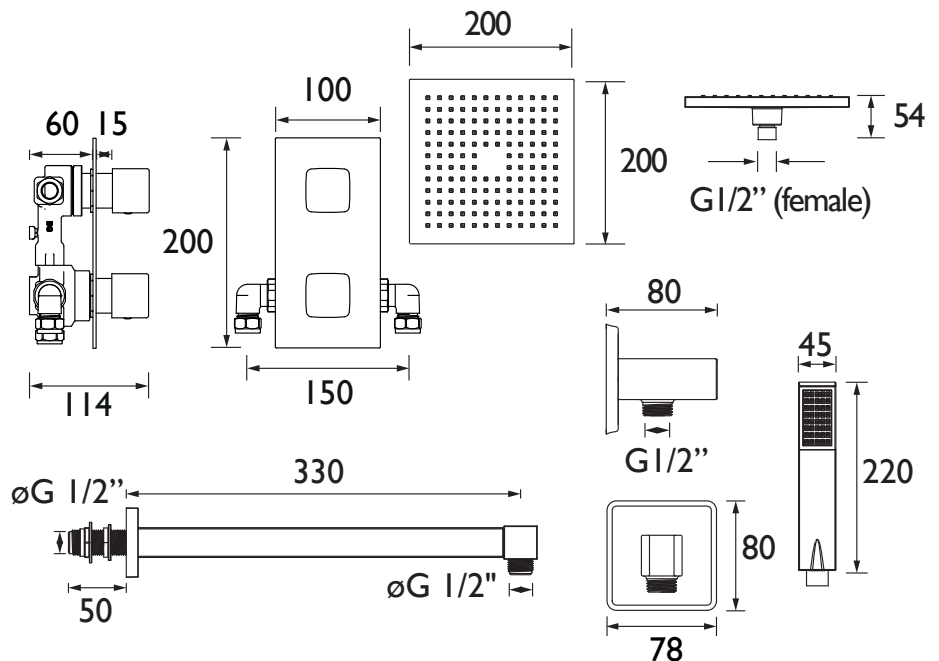

Flow Rates (l/min)

| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 |
|----------------------------|-----|-----|-----|-----|-----|------|
| Through Handset (mixed) | 2.1 | 3.3 | 4.7 | 6.6 | 8.1 | 10.5 |
| Through Fixed Head (mixed) | 2.2 | 3.5 | 5 | 7 | 8.6 | 11.1 |

TECHNICAL DATA SHEET



BRISTAN

D3