

N2 CSHXVO G

1901 Shower Range 1901 Exposed Concentric Gold Shower Valve Only



Features:

- 15mm inlet connections
- Easy replacement with adjustable inlets so you can use on existing pipework centres between 136mm and 158mm
- Thermostatic cartridge with preset temperature stop at 42°C
- Supplied with 2 x 8L/min flow regulators
- Bottom outlet

Product Certifications:



WRAS Cert. Number: 1702038
WRAS Expiry Date: 28/02/2022




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Gold
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Exposed
Shower Head Type:	None
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally Balanced
Working Pressure Range:	Min. 0.2 Bar - Max. 5.0 Bar
Connection Inlet:	1/2"
Connection Outlet:	1/2"
Isolation Valve Included:	No
Check Valve Included:	No

Dimensions (measurements in mm)

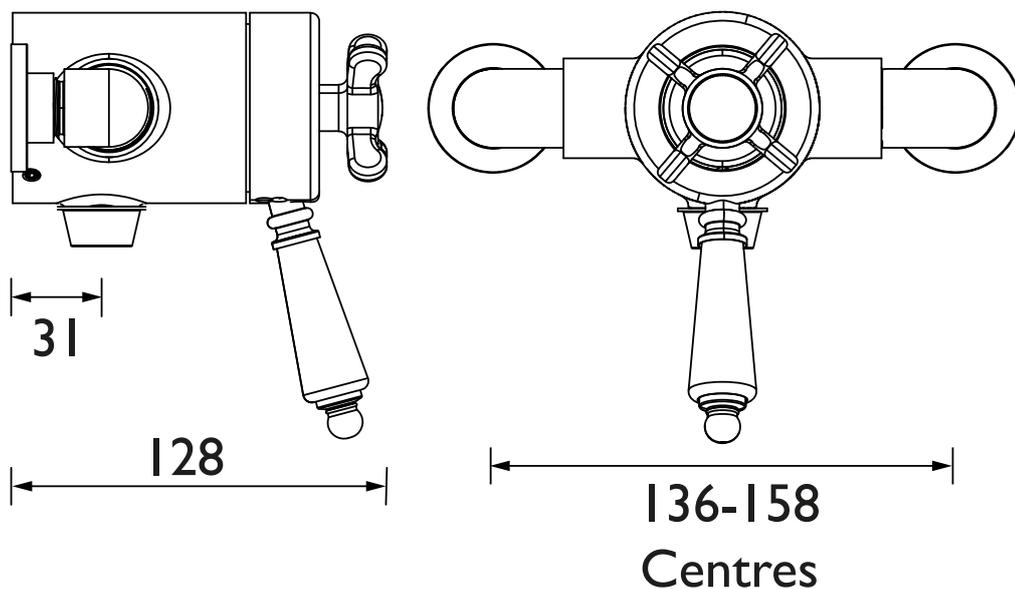

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	8.5	11.8	14.1	13.8	13.6	10.6

TECHNICAL
DATA
SHEET



BRISTAN

D7