


# N2 SHCVO C

## 1901 Shower Range 1901 Recessed Thermostatic Dual Control Chrome Shower Valve Chrome

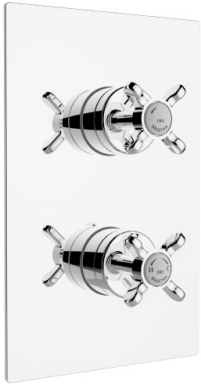

### Features:

- 15mm inlet connections
- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 45mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 65°C

### Product Certifications:



WRAS Certificate No: 1409055  
WRAS Expiry Date: 30/09/2019




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Dual Control
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All, preferably balanced
Minimum Dynamic Pressure:	0.2 bar
Connection Inlet:	15mm Compression Connections
Isolation Valve Included:	No
Check Valve Included:	Yes

### Dimensions (measurements in mm)

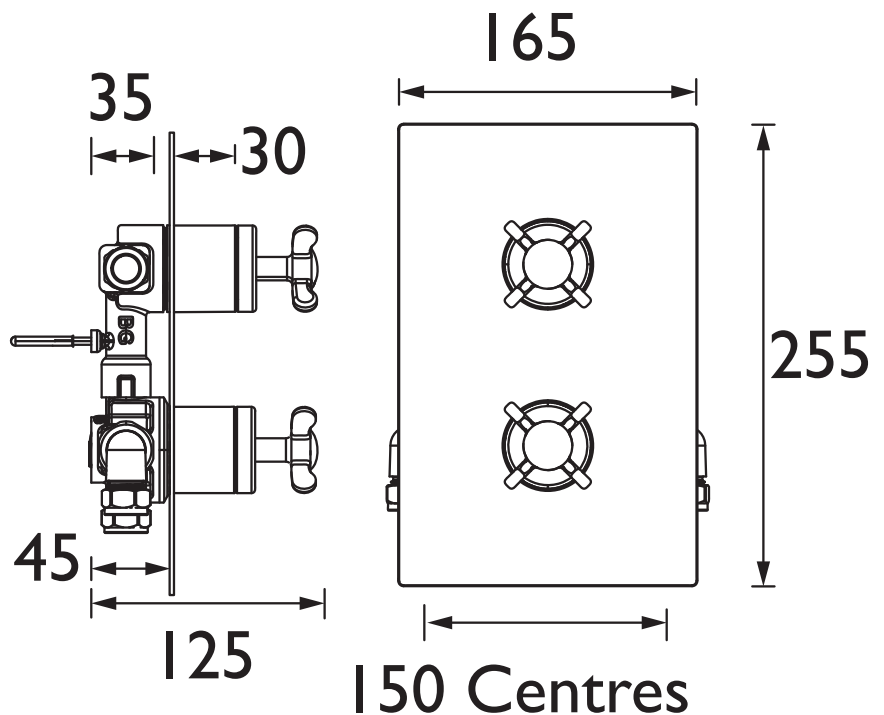

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	7.3	13.7	20.5	29.3	36.3	47.5
Outlet 1 (Flow Regulator)	5.2	8.2	10.6	10.7	11.4	12.4
Outlet 2	9.3	18	26.7	38.7	47.9	61.7
Outlet 2 (Flow Regulator)	4	7.2	9	9.8	10.7	10

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D5